


DELUXE VACUUM WELDING MACHINE NITROGEN (450MM, 2 MODELS)



SKU: EM450DX/N

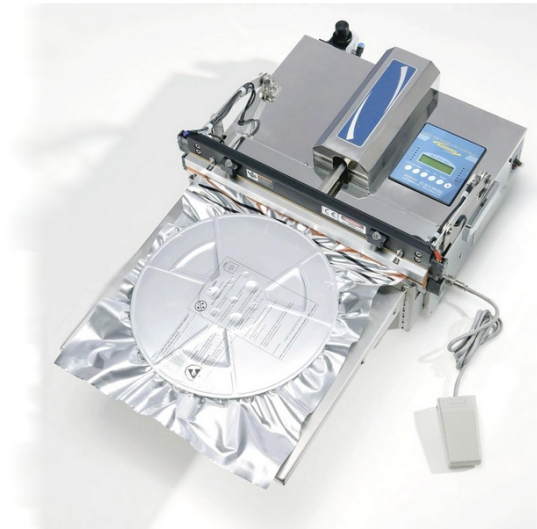

VACUUM SEALER WITH AIR FLUSHING KIT - 450 MM

Quickly creates a perfect vacuum with any type of bag

EM450DX/N - Deluxe series high efficiency vacuum welding machine equipped with pneumatic nozzle, **450 mm sealing bar** (single or double) and **nitrogen flushing kit**.

Fully programmable, foot operated, **ESD-safe**.

Available models:

- **Single sealing bar** (149411E) - Suitable for ESD barrier bags with thickness **up to 90 µm**
- **Double sealing bar** (149411F) - Suitable for ESD barrier bags with thickness **up to 150 µm**.

Alternative models: With 600 mm sealing bar (single or double) - Without nitrogen cycles' kit (single or double sealing bar).

ATTENTION:

The machine needs external compressed air for operating, and it needs a compressor with a capacity above 250 NI/min.

The pressure of compressed air supplied to the machine should be set at 5~6.5 kgf/cm².



If the supplied compressed air exceeds 7 kgf/cm², the machine could get damaged. In the other hand, if the compressed air is less than 4.5 kgf/cm², there can be malfunctionings.

VARIATIONS

SKU	Description	Set-up
149411E		Single sealing bar
149411F		Double sealing bar