


## QUICKSTAT PLUS - ESD FLOOR MAT ROLL (1.5X10M, TH. 2.5MM)



SKU: EL87667

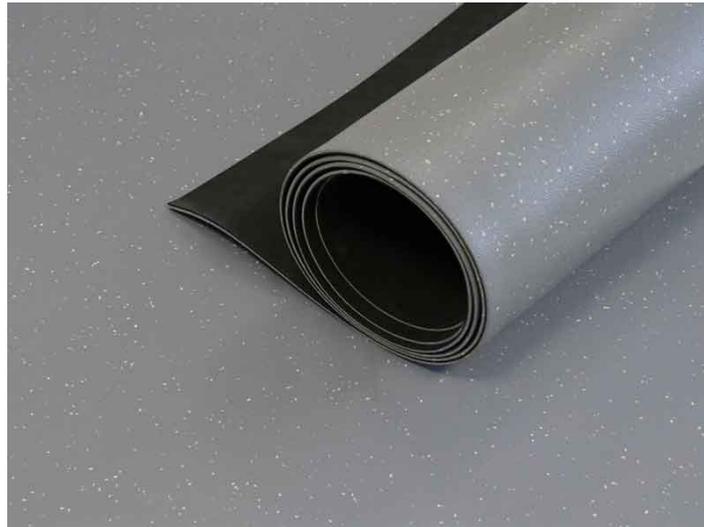

### LIGHT GREY ESD FLOOR MAT (2.5MM)

**Quickstat Plus - Anti-static ESD safe floor mat in 10 meters roll.**

**Double-layer** rubber mat (static-dissipative top layer / black conductive bottom layer).  
Abrasion-resistant. Suitable for heavy-duty use.

#### Specifications

- Material: Synthetic rubber
- Dimensions (WxL): **1.50 x 10 m** - Thickness: **2.5 mm**
- Upper layer colour: **Titanium grey** - Finishing: Matt
- ESD safe: Yes - Contact resistance (EN 1081):  $10^6 - 9 \times 10^7$  Ohm.

#### Quickstat series ESD safe mats

Quickstat ESD safe floor mats are characterized by a very **easy, quick and cost-effective installation process.**



Their conductivity depends on the highly conductive lower layer.

#### INSTALLATION METHODS

- **In very small areas** (up to 2 sqm, using a single mat cut), Quickstat can be laid simply using a common double-sided adhesive tape, making possible an effective installation at extremely low costs. Earthing can be done by installing a grounding cable equipped with a 1 MOhm resistor.
- **In bigger areas** (and in any case, when using multiple mat cuts), the use of conductive glue is necessary, having previously installed a **copper grid** on the floor below, connected with earthing points - ATTENTION: Gluing is not recommended in environments with rising damp values higher than 2%.