


ESD FLOOR MAT QUICKSTAT DELUXE (1.9X10M, TH. 2.5MM)



SKU: 131794A

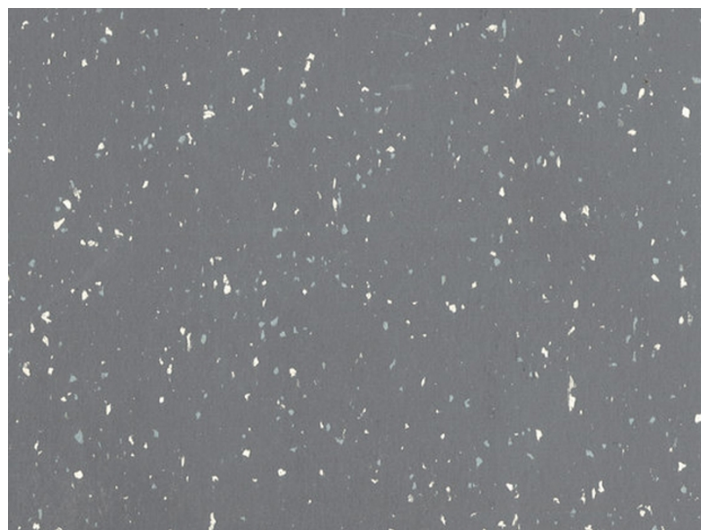

ESD FLOOR MAT QUICKSTAT DELUXE - 2.5MM

Quickstat Deluxe - **High quality ESD floor mat.**

Rubber floor mat made of two calendered and vulcanized layers (DIF **static-dissipative top layer**, ECF **conductive bottom layer**). The top layer is made of a compound with interspersed multicoloured flecks of a maximum diameter equal to 2.0 mm. Slightly embossed reflection breaking surface.

Specifications

- Dimensions: **1.90x10 m** - Thickness: **2.5mm**
- Colour of the upper layer: **Light grey**
- Hardness (ISO 7619): 85 Shore A
- Resistance to a groundable point (EN 61340-4-1): $\leq 1 \times 10^9$ Ohm

Quickstat Deluxe ESD Mats

Quickstat ESD floor mats has an extremely easy, quick and cost-effective installation process.

Unlike most of ESD floor mats, their conductivity doesn't depend on the type of adhesive or on the installation process. In fact,



thanks to the highly conductive lower side, Quickstat mats can be simply layed by using a common bi-adhesive tape (for small areas) or conductive glue, making possible an effective installation at extremely low costs.

A copper grid on the sub-floor is required for grounding.

ATTENTION: In case of gluing, the laying of Quickstat requires a humidity rising damp value under 2%.

Download TDS > [Quickstat Deluxe ESD Floor Mats TDS](#)