


## QUICKSTAT DELUXE - ESD FLOOR MAT (1.9X10M, TH. 2.5MM)



SKU: 131794A

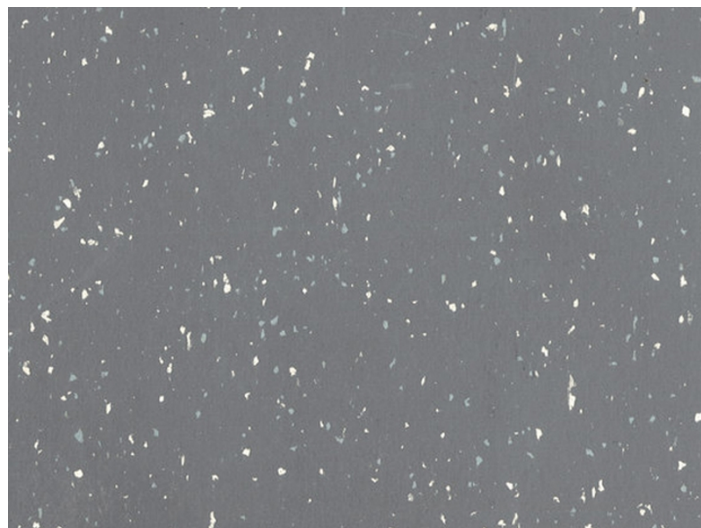

### LIGHT GREY ESD FLOOR MAT (2.5MM) IN 10M ROLL

**Quickstat Deluxe – Anti-static ESD safe floor mat made of 2 high-quality rubber layers** (static-dissipative top layer / black conductive bottom layer), calendered and vulcanized together. The compound which the top layer is made of, contains multicoloured flecks with a maximum diameter of 2 mm.

Slightly embossed reflection breaking surface.

#### Specifications

- Dimensions (WxL): **1.90 x 10 m** - Thickness: **2.5 mm**
- Colour of the upper layer: **Light grey**
- Hardness (ISO 7619): 85 Shore A
- Resistance to a groundable point (EN 61340-4-1):  $\leq 1 \times 10^9$  Ohm
- Weight: 3.70 kg/sqm.



## Quickstat Deluxe ESD mats

**Quickstat Deluxe ESD safe floor mats** are characterized by an easy, quick and cost-effective installation process. Their conductivity depends on the highly conductive lower layer.

### INSTALLATION

- **In very small areas** (up to 2 sqm, using a single mat cut), Quickstat can be layed simply using a common double-sided adhesive tape, making possible an effective installation at extremely low costs. Earthing can be done by installing a grounding cable equipped with a 1 MOhm resistor
- **In bigger areas** (and in any case, when using multiple mat cuts), the use of conductive glue is necessary, having previously installed a copper grid on the floor below, connected with earthing points - **ATTENTION: Gluing is not recommended in environments with rising damp values higher than 2%.**

Download TDS > [\*\*Quickstat Deluxe ESD Floor Mats TDS\*\*](#)